





SUNCOOL FABRICS

Dorus

Openness
Factor 4%

FOCUS ON QUALITY

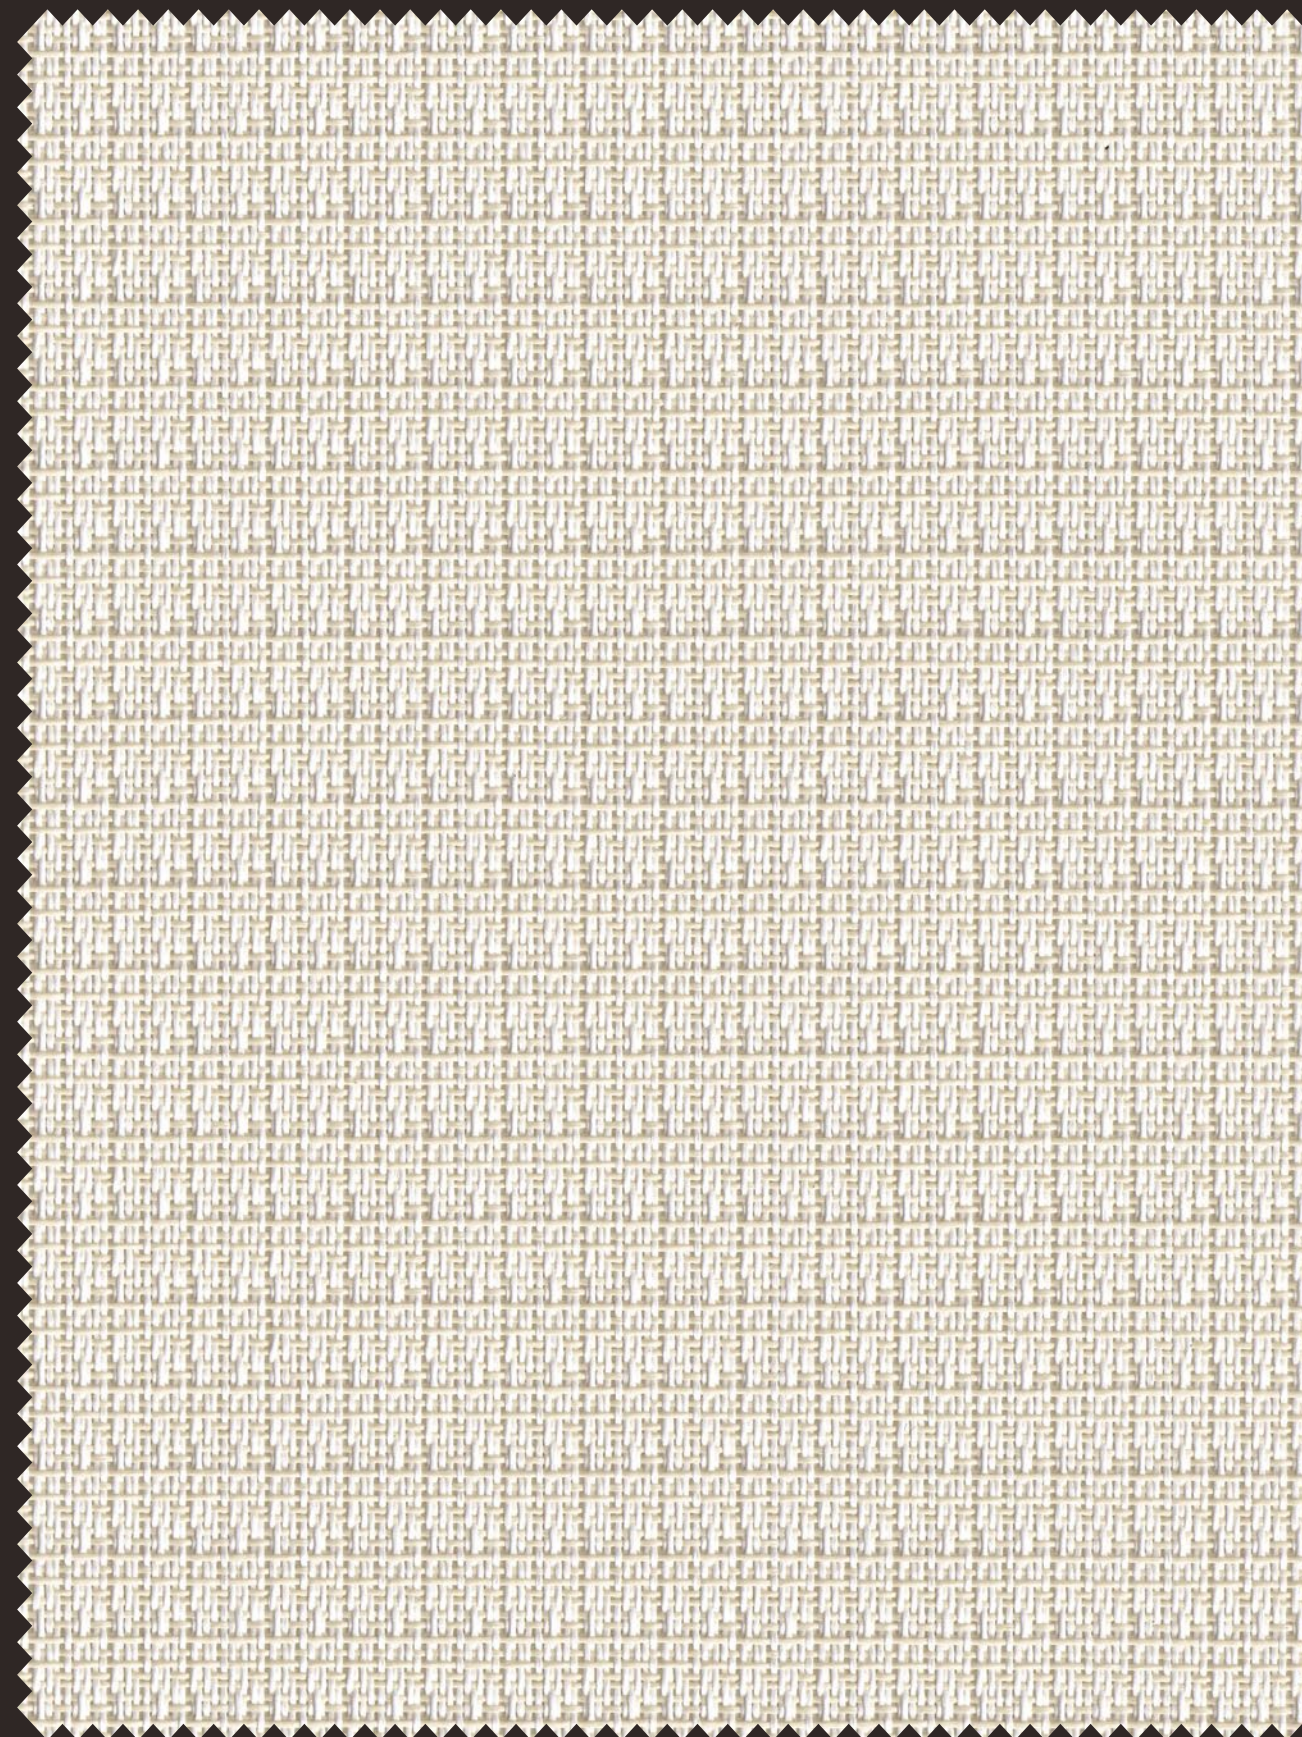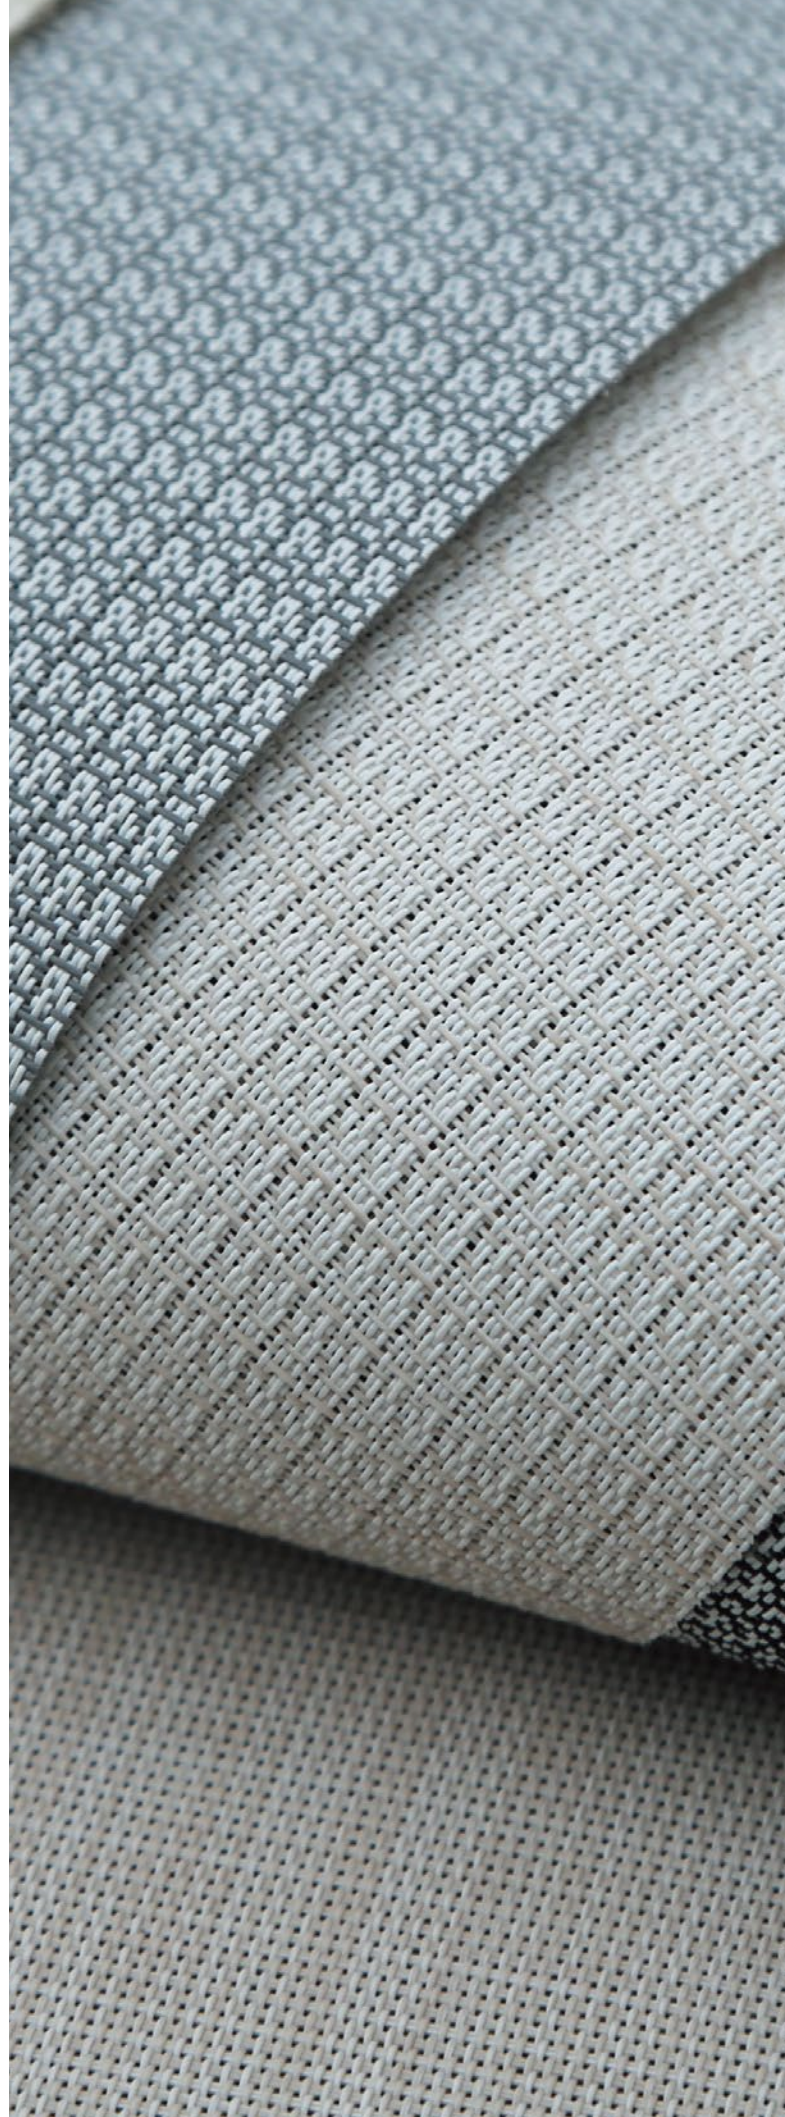


Cutting: Cold Cut, Ultrasonic, Crush Cut, or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic, or Sewing


DORUS




SC-D1-401

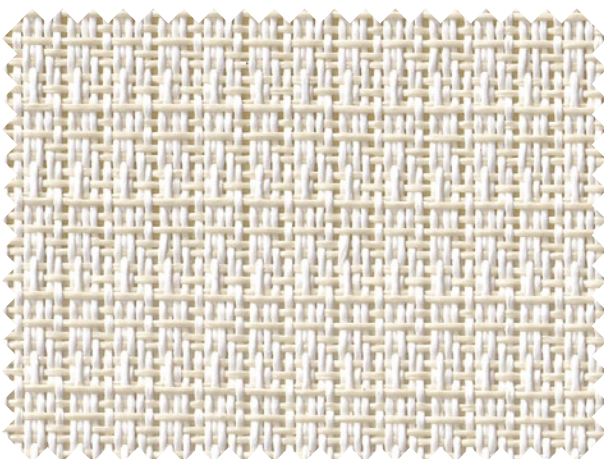


SC-D1-402

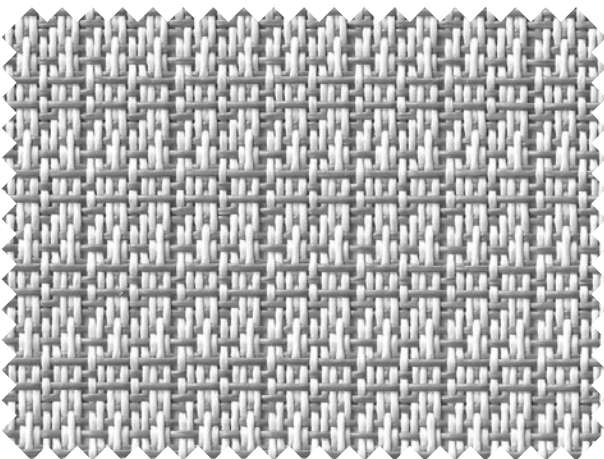

SC-D1-403

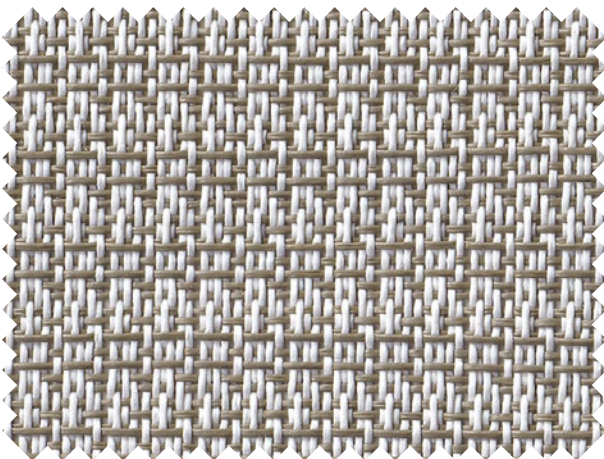

SC-D1-404

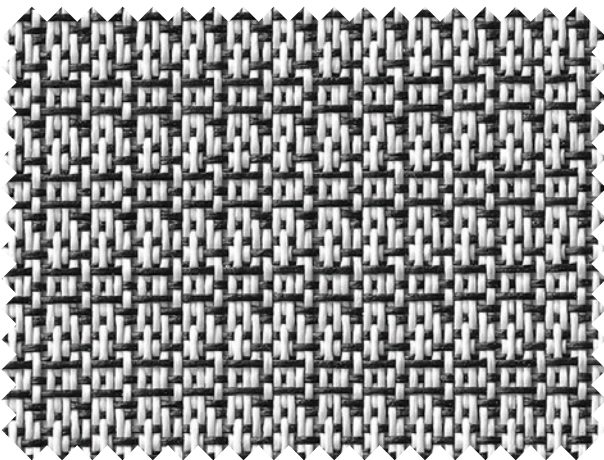

SC-D1-405

TECHNICAL PARAMETER

COMPOSITION	30%Polyester + 70%PVC	
FINISHED WIDTH	118 inch	
THICKNESS	0.026" ± 5%	
WEIGHT	12.37 oz/yd² ± 5 %	
COLOR FASTNESS	8 Grade	
YARN COUNT	50 * 40	
BREAKING STRENGTH	Warp 1450 N/5cm	Weft 970 N/5cm

PRODUCT CERTIFICATION

HEALTH CERTIFICATION	GREENGUARD GOLD、REACH、CHINA ENVIRONMENTAL LABELLING、GB/T 2912.1-2009、SGS	
BACTERIA AND FUNGAL RESISTANCE	ASTM G21 GB/T 31402-2015/ISO 22196:2007(IDT)	
FIRE RESISTANCE	B1 (CHINA)、NFPA701 (USA)	
COLOR FASTNESS	8 Grade	
WARRANTY	5-years	
FABRICATION METHODS	Cutting: cold cut / ultrasonic / crush cut Seaming / Hemming: thermal / high-frequency / ultrasonic / sewing	
CARE AND CLEANING	Remove dust with vacuum cleaner or compressed air. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.	

