





# SUNCOOL FABRICS

Atlas

Openness  
Factor 1%


FOCUS ON QUALITY

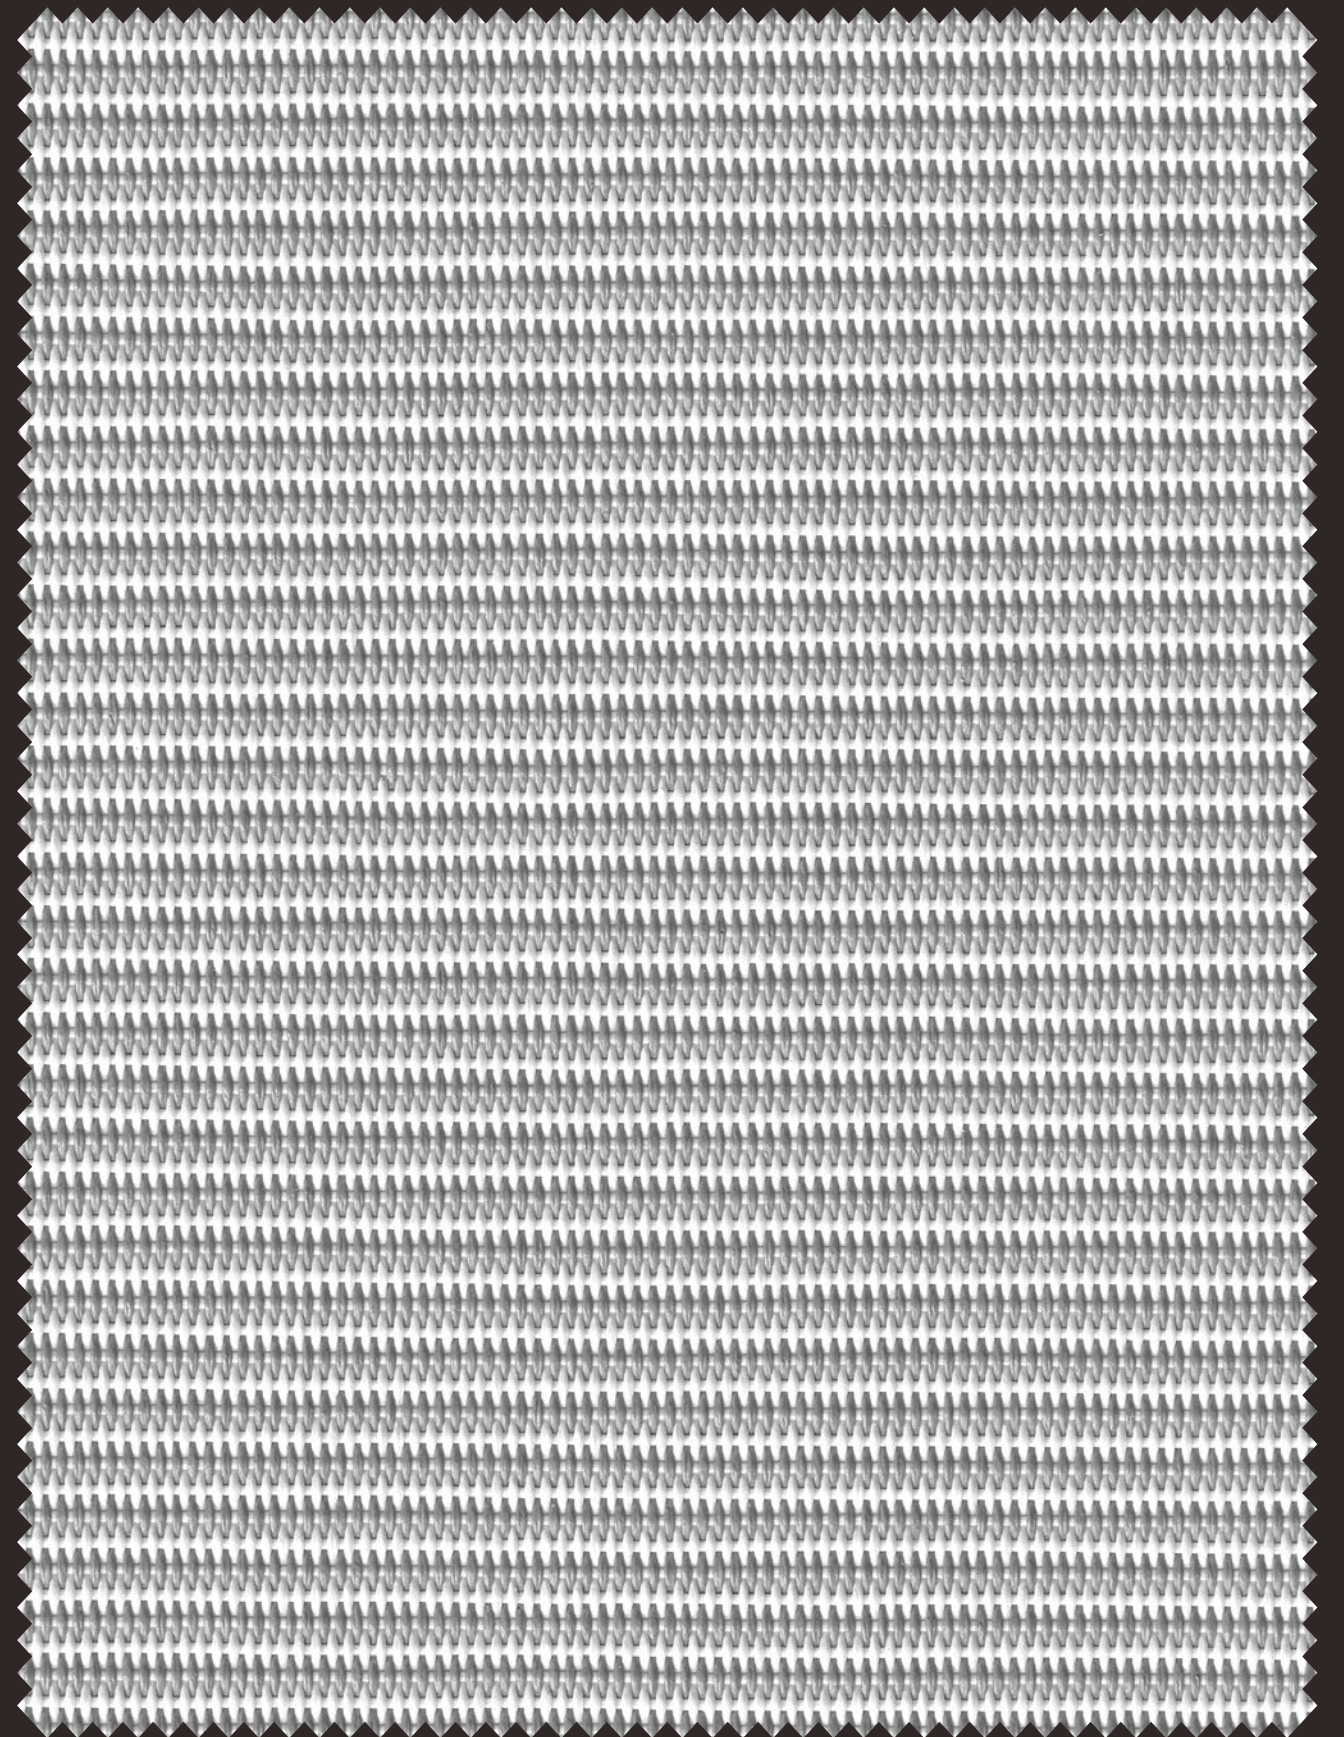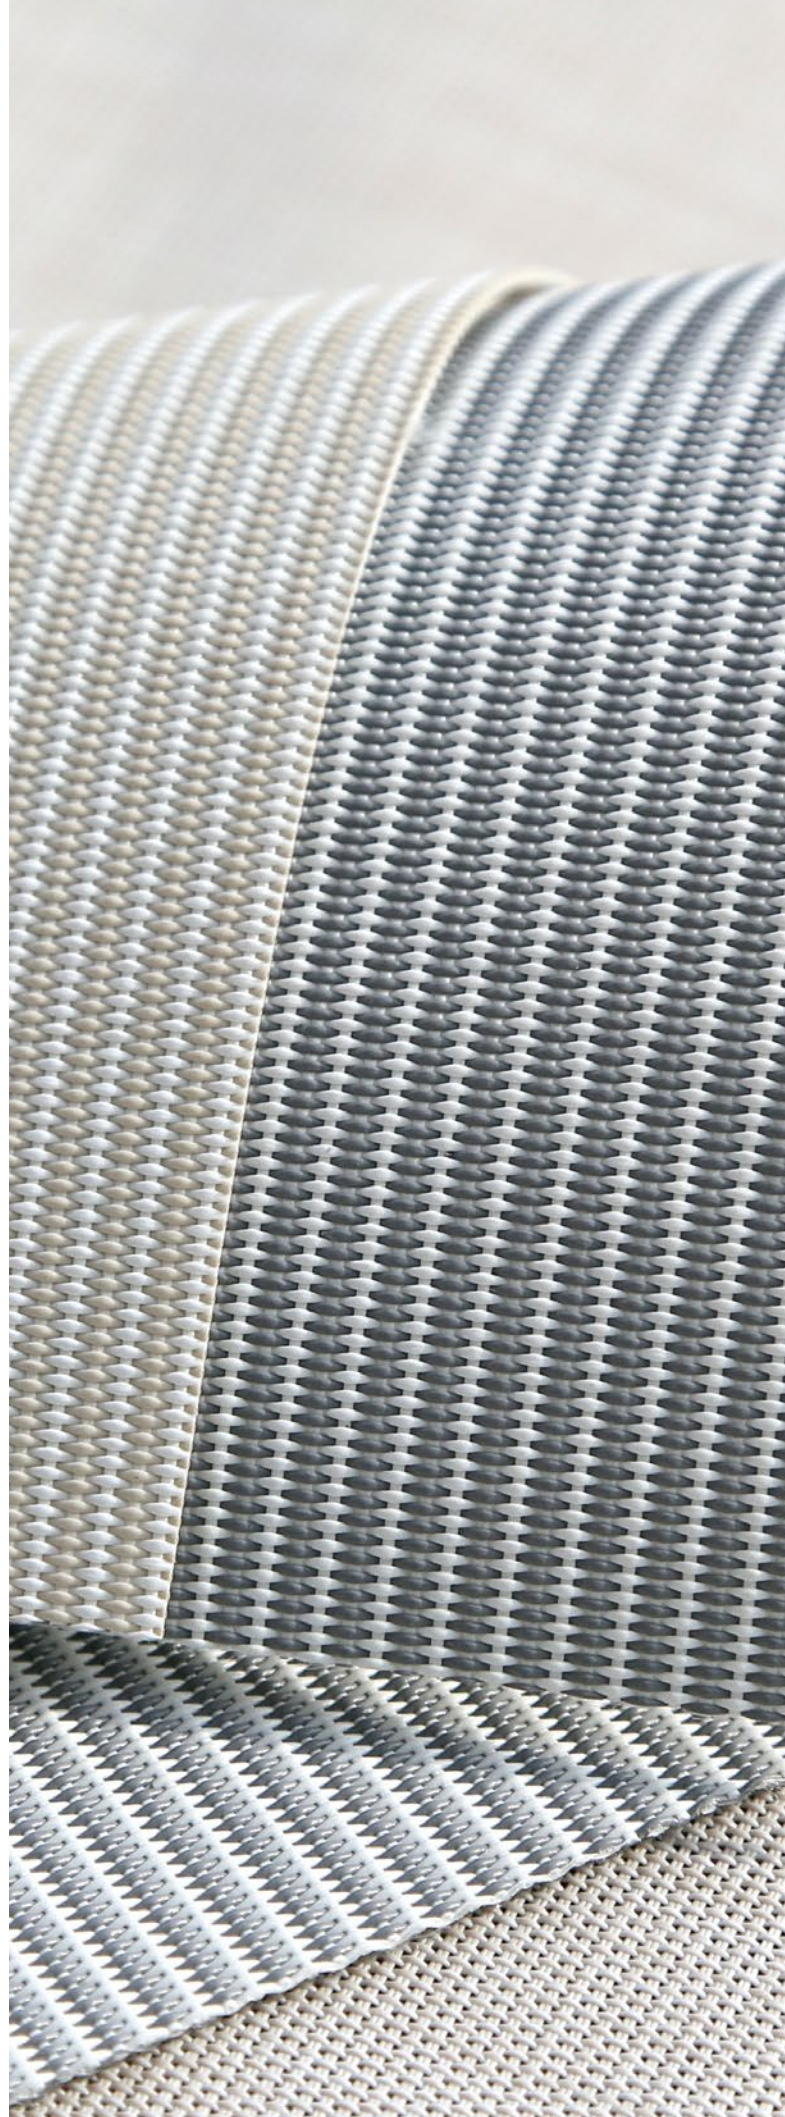


Cutting: Cold Cut, Ultrasonic, Crush Cut, or Laser  
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic, or Sewing




ATLAS

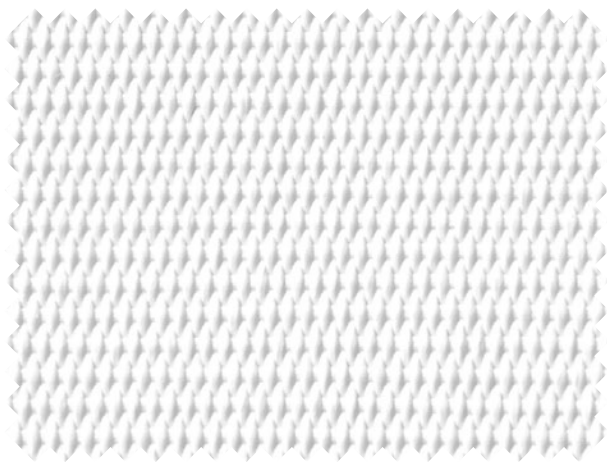

SC-A6-101

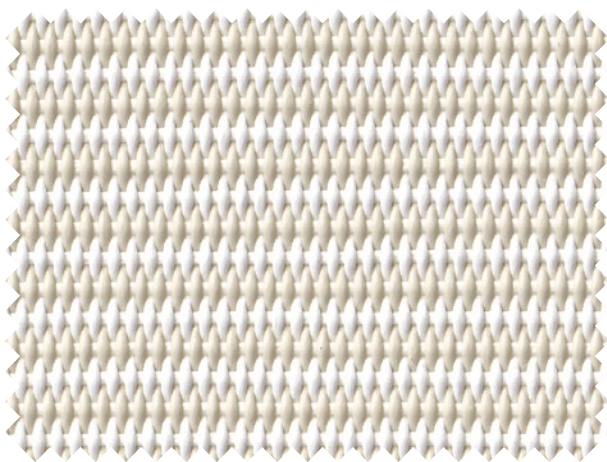

SC-A6-102

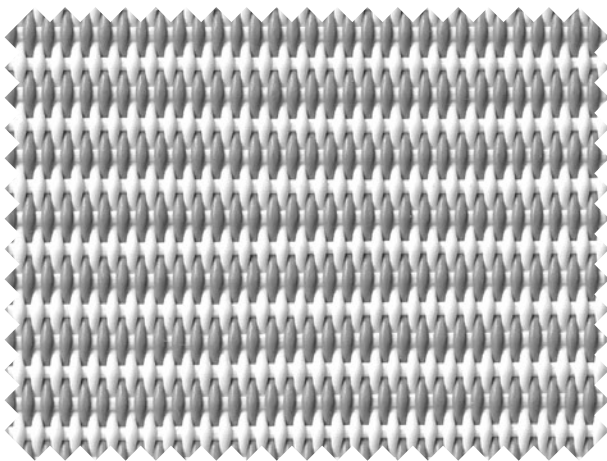

SC-A6-103

TECHNICAL PARAMETER

COMPOSITION	25%Polyester + 75%PVC	
FINISHED WIDTH	118 inch	
THICKNESS	0.039" ± 5%	
WEIGHT	21.35 oz/yd² ± 5 %	
COLOR FASTNESS	8 Grade	
YARN COUNT	50 * 16	
BREAKING STRENGTH	Warp 3824 N/5cm	Weft 1224 N/5cm

PRODUCT CERTIFICATION

HEALTH CERTIFICATION	GREENGUARD GOLD、REACH、CHINA ENVIRONMENTAL LABELLING、GB/T 2912.1-2009、SGS	
BACTERIA AND FUNGAL RESISTANCE	ASTM G21 GB/T 31402-2015/ISO 22196:2007(IDT)	
FIRE RESISTANCE	B1 (CHINA)、NFPA701 (USA)	
COLOR FASTNESS	8 Grade	
WARRANTY	5-years	
FABRICATION METHODS	Cutting: cold cut / ultrasonic / crush cut Seaming / Hemming: thermal / high-frequency / ultrasonic / sewing	
CARE AND CLEANING	Remove dust with vacuum cleaner or compressed air. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.	

