





ZIPPER SCREEN

FOR OUTSIDE SUN-SHADING
WITH SIDE TRACK

Zipper Screen 60


Openness
Factor 6%

FOCUS ON QUALITY

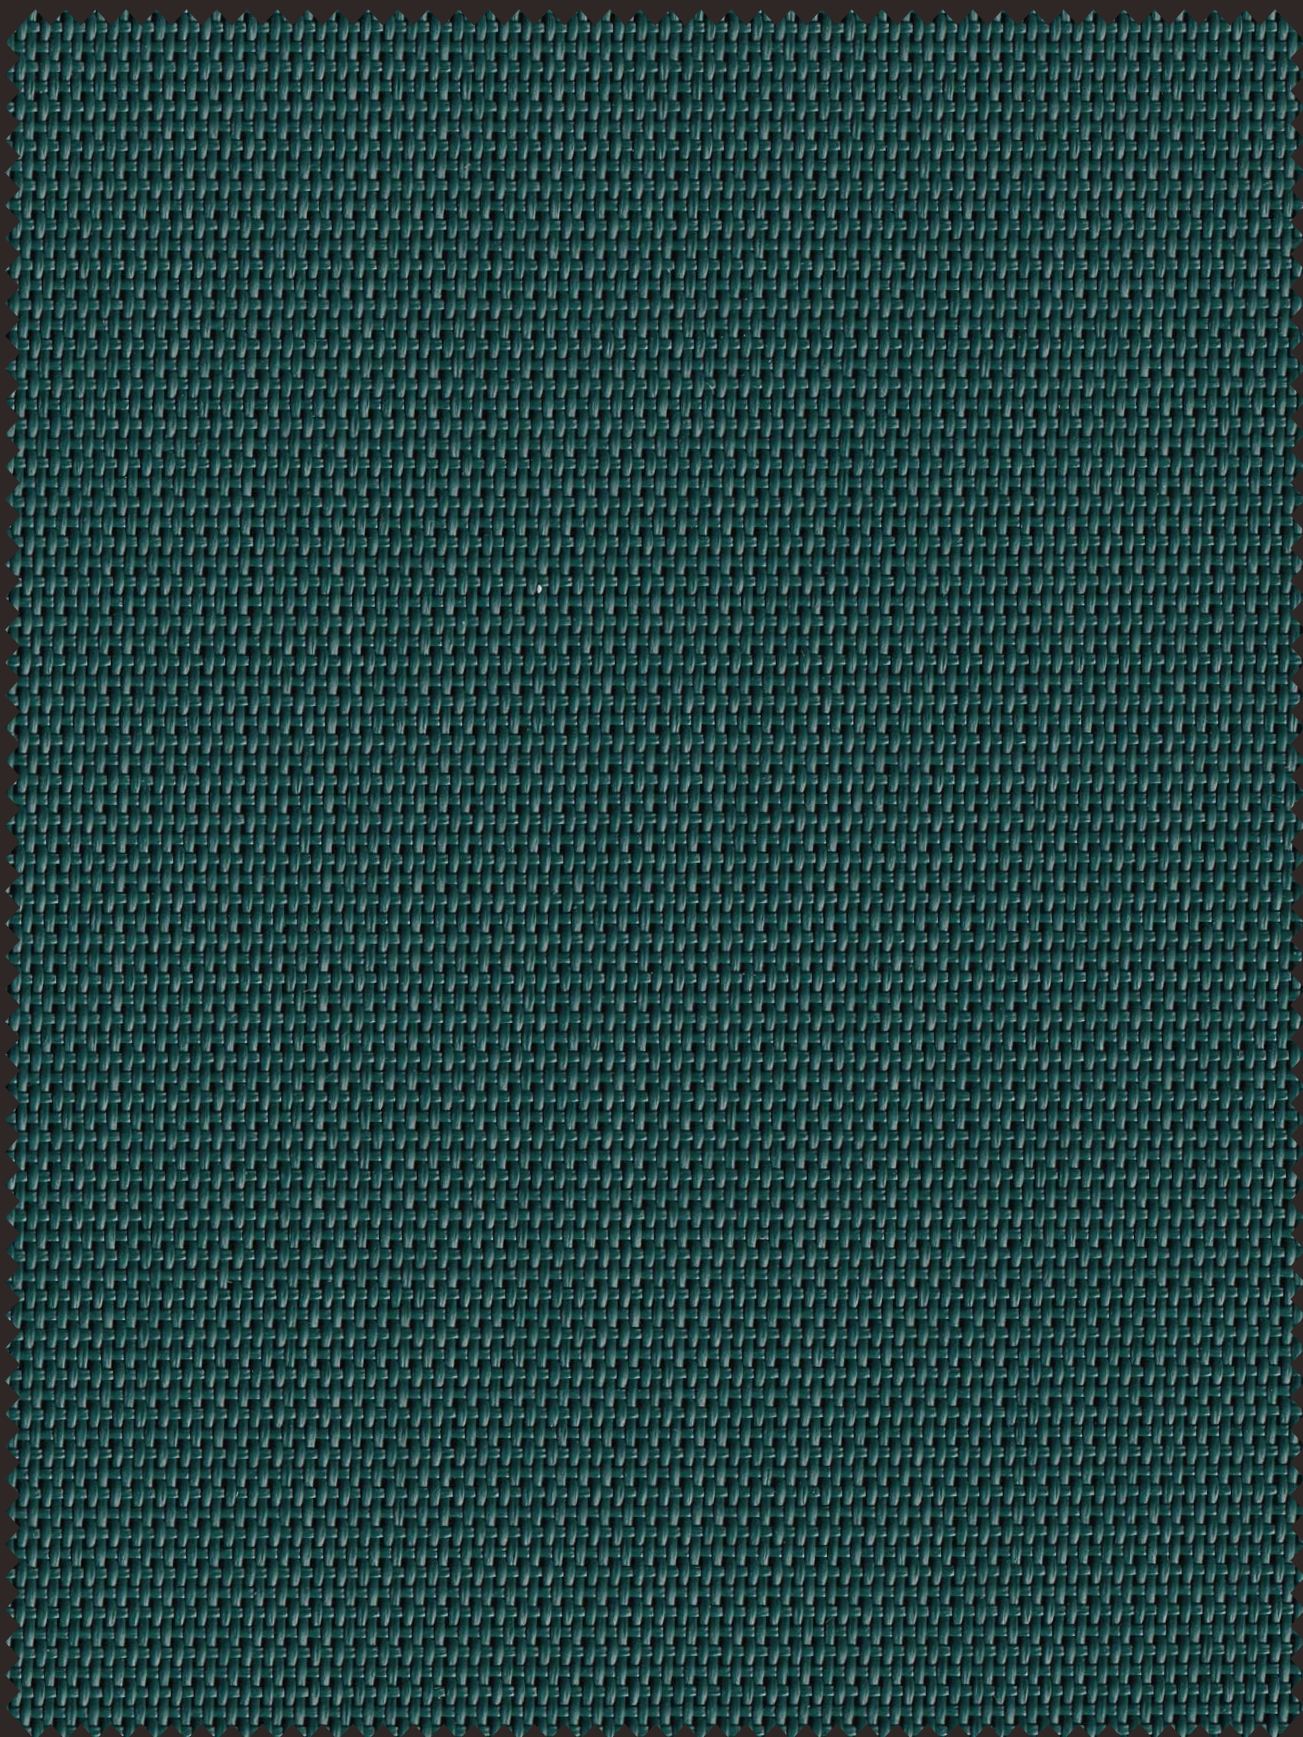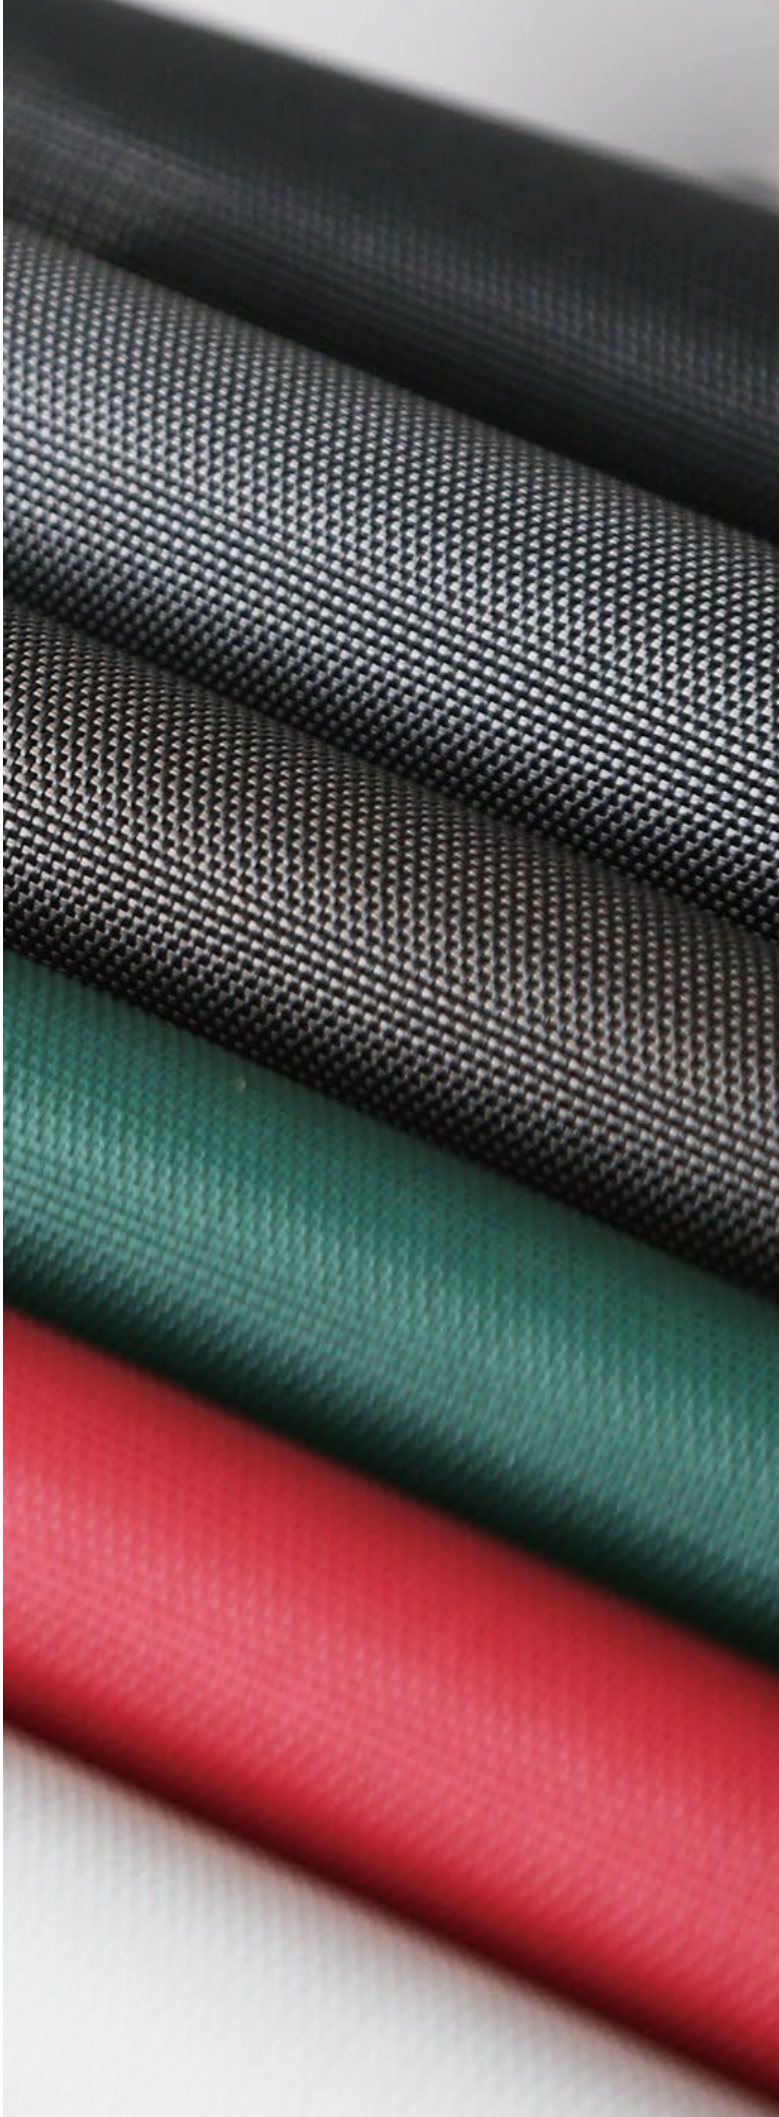


Cutting: Cold Cut, Ultrasonic, Crush Cut, or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic, or Sewing


ZIPPER SCREEN 60

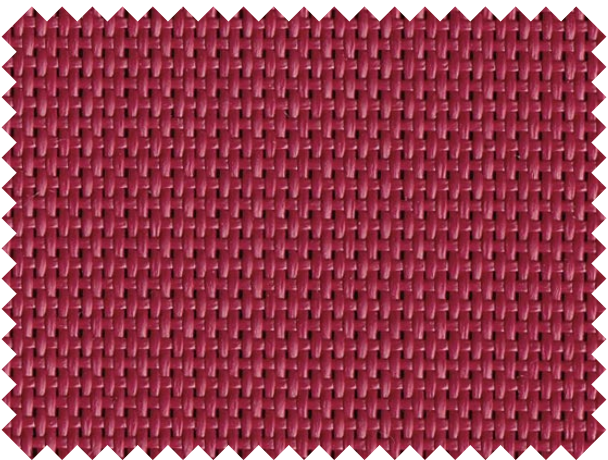


TSL-204

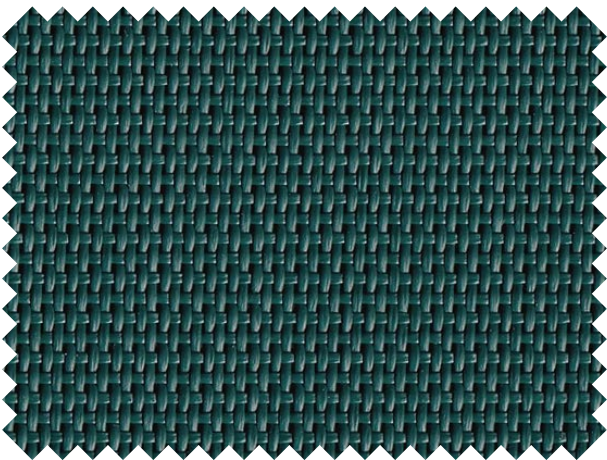


TSL-205

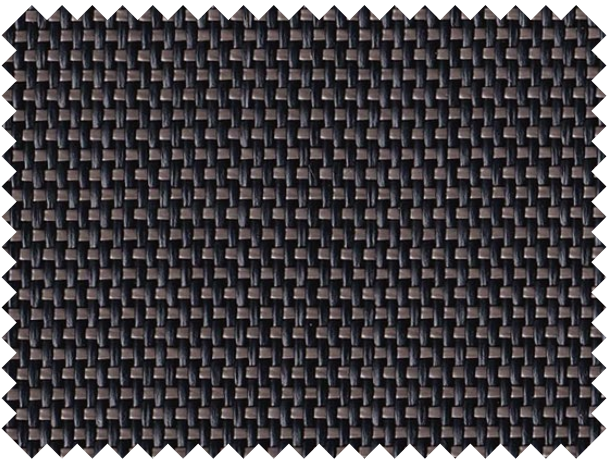

TSL-206

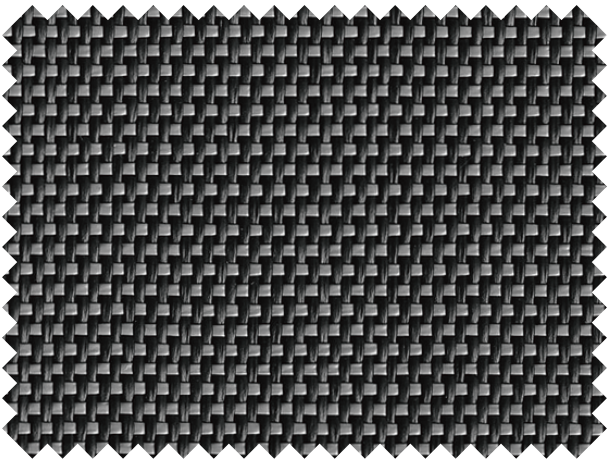

TSL-207

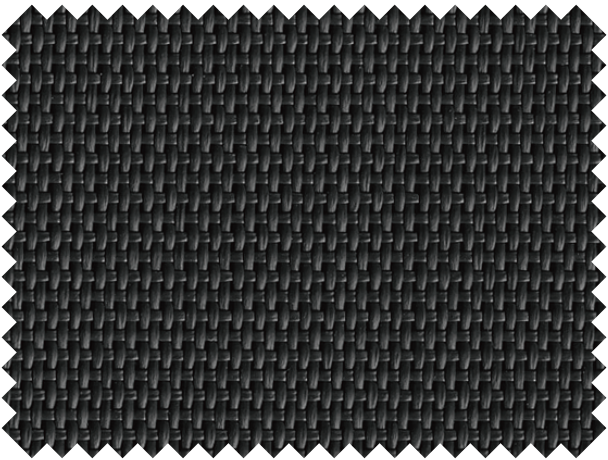

TSL-208

TECHNICAL PARAMETER

COMPOSITION	38%Fiberglass + 62%PVC	
FINISHED WIDTH	126 inch	
THICKNESS	0.020" ± 5%	
WEIGHT	16.81 oz/yd² ± 5 %	
COLOR FASTNESS	8 Grade	
YARN COUNT	40 * 24	
BREAKING STRENGTH	Warp 2000 N/5cm	Weft 1800 N/5cm

PRODUCT CERTIFICATION

HEALTH CERTIFICATION	GREENGUARD GOLD、REACH、CHINA ENVIRONMENTAL LABELLING、GB/T 2912.1-2009、SGS	
BACTERIA AND FUNGAL RESISTANCE	ASTM G21	GB/T 31402-2015/ISO 22196:2007(IDT)
FIRE RESISTANCE	B1 (CHINA)、NFPA701 (USA)	
COLOR FASTNESS	8 Grade	
WARRANTY	5-years	
FABRICATION METHODS	Cutting: cold cut / ultrasonic / crush cut Seaming / Hemming: thermal / high-frequency / ultrasonic / sewing	
CARE AND CLEANING	Remove dust with vacuum cleaner or compressed air. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.	

