

N VOLTE

SILK BAMBOO

LIGHT-FILTERING (L/F)
<1% OPENNESS FACTOR

BLACKOUT (B/O)
0% OPENNESS FACTOR


DECORATIVE




Silk Bamboo's subtly textured surface introduces depth and dimension to any room. Choose from complete privacy with the solid white backing on the blackout collection or semi-privacy and subtle light transmittance with the color-coordinated light-filtering collection. Both styles perform exceptionally well by blocking high levels of heat and light from entering the room.







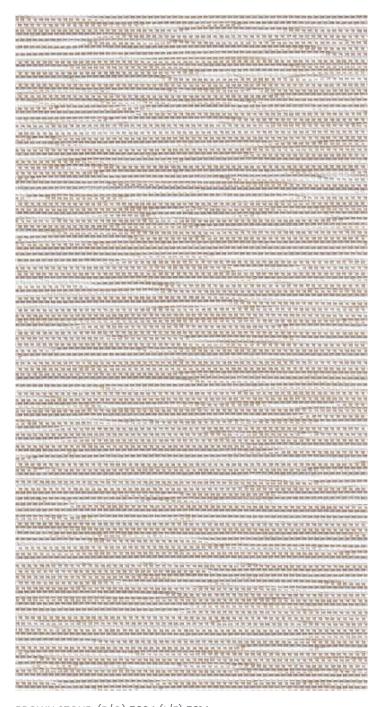

BROWN STONE (B/O) 5304 (L/F) 5314




BRIGHT LIGHT (B/O) 5301 (L/F) 5311



TUMBLEWEED (B/O) 5302 (L/F) 5312



SAND (B/O) 5303 (L/F) 5313



STEEL (B/O) 5305 (L/F) 5315

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION 100% Polyester

ROLL WIDTH 102" ROLL LENGTH 33 yd

WEIGHT / YD² (L/F) 6.53 oz/yd^2 (B/O) 10.60 oz/yd^2 THICKNESS (L/F) $.014'' \pm 5\%$ (B/O) $.022'' \pm 5\%$

COLOR FASTNESS 4.5 (AATCC 16-2003)

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY



FLAME RETARDANT

OEKO-TEX® STANDARD 100

FREE OF HARMFUL CHEMICALS UL GREENGUARD GOLD

HEALTHY INDOOR AIR QUALITY ROHS COMPLIANT

FREE OF HARMFU

5 YEAR WARRANTY

GUARANTEED

ASTM G-21 & E-2180

BACTERIA & FUNGAL RESISTANCE NFPA® 701-TM

FIRE RETARDAN

