

HELIOS

OPENNESS FACTOR 1% SCREEN FABRIC



Your Solutions Weaver and Fabric Support Partner

Helios' clean and proportional 1x1 basketweave construction allows for small amounts of transmitted light with controlled privacy. This minimal fabric is an excellent solution for commercial spaces, schools, hospitals, and more.





RO LLER SH AD ES


RO MA N SH AD ES



PA NE L TR AC KS



SK YLIGHT TR AC KS

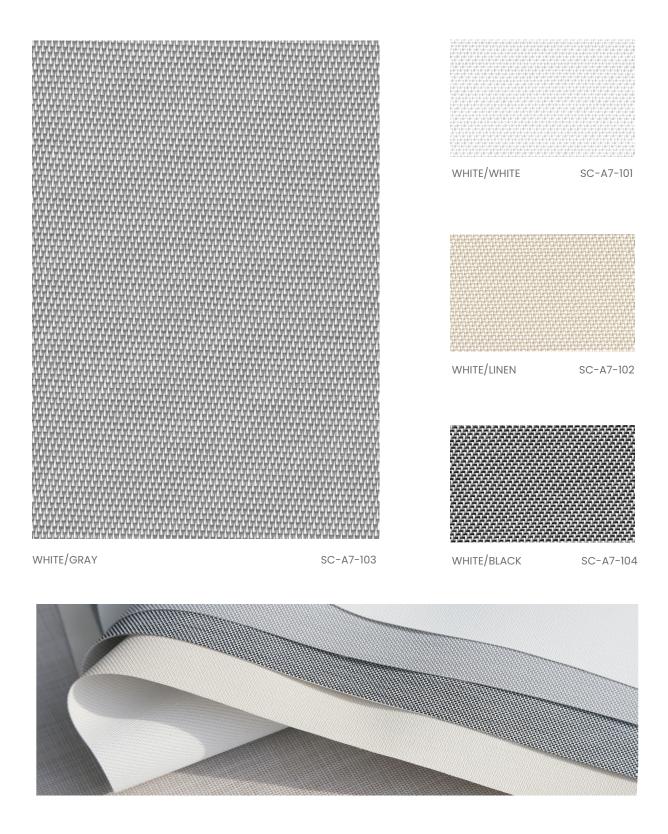

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118″
ROLL LENGTH	33 yd
WEIGHT / YD ²	15.46 oz/yd²
THICKNESS	.029" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	82*34
BREAKING STRENGTH	Warp 2740 N/5cm Weft 1200 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY



