


OMEGA 3%

OPENNESS FACTOR 3% SCREEN FABRIC



Your Solutions Weaver and Fabric Support Partner

Omega is a popular fabric known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.

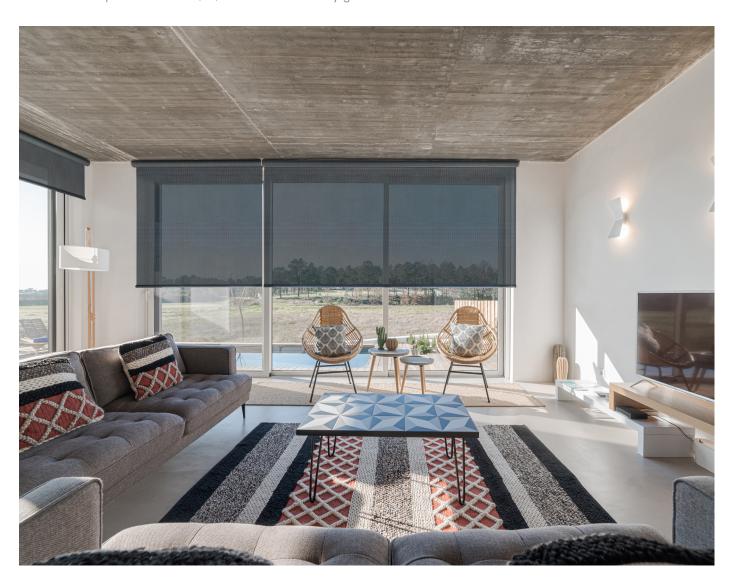



RO LLER SH AD ES




RO MA N SH AD ES




PA NE L TR AC KS



SK YLIGHT TR AC KS

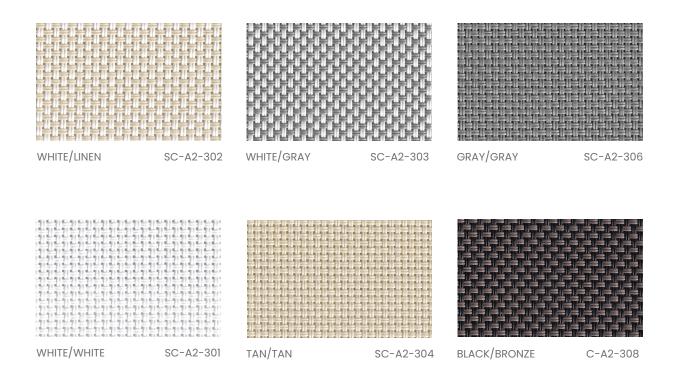



BLACK/GRAY SC-A2-310



BLACK/BLACK SC-A2-311

BRIGHT WHITE SC-A2-300

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION 30% Polyester + 70% PVC

ROLL WIDTH 98" / 118"

ROLL LENGTH 33 yd

WEIGHT / YD 2 12.96 oz/yd 2 THICKNESS .026" \pm 5% COLOR FASTNESS 8 Grade (SGS)

YARN COUNT 54*44

BREAKING STRENGTH Warp 1800 N/5cm

Weft 1434 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19

FLAME RETARDANT

OEKO-TEX® STANDARD 100

FREE OF HARMFU CHEMICALS UL GREENGUARD GOLD

AIR QUALITY

ROHS COMPLIANT

> FREE OF HARMFU METALS

5 YEAR WARRANTY

> QUALITY GUARANTEFI

ASTM G-21 & E-2180

BACTERIA & FUNGAL RESISTAN NFPA® 701-TM

EIDE DETADDAN

