

SUN COOL
FABRICS

OMEGA 5%

OPENNESS FACTOR 5%
SCREEN FABRIC



Your Solutions Weaver and Fabric Support Partner


Omega is a popular fabric known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.




RO LLER
SH AD ES




RO MA N
SH AD ES



PA NE L
TR AC KS




SK YLIGHT
TR AC KS

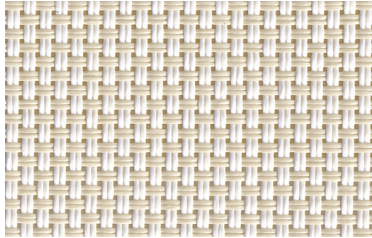


WHITE/LINEN

SC-A2-502

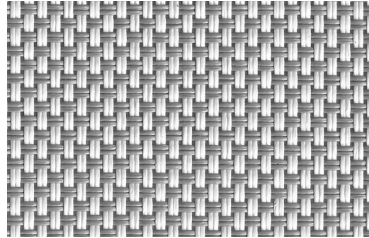

WHITE/GRAY

SC-A2-503

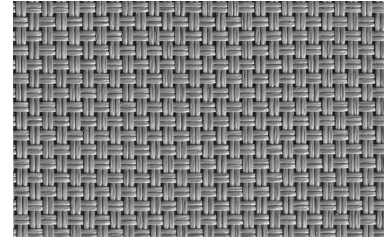


GRAY/GRAY

SC-A2-506




WHITE/WHITE

SC-A2-501

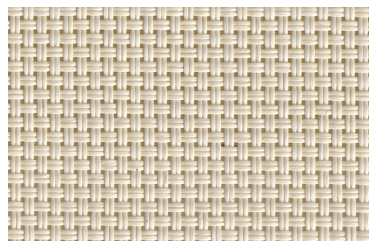


TAN/TAN

SC-A2-504

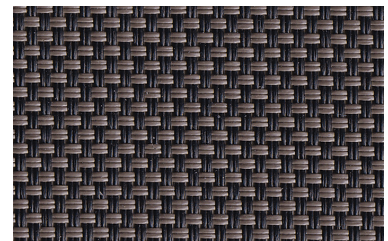


BLACK/BRONZE

SC-A2-508

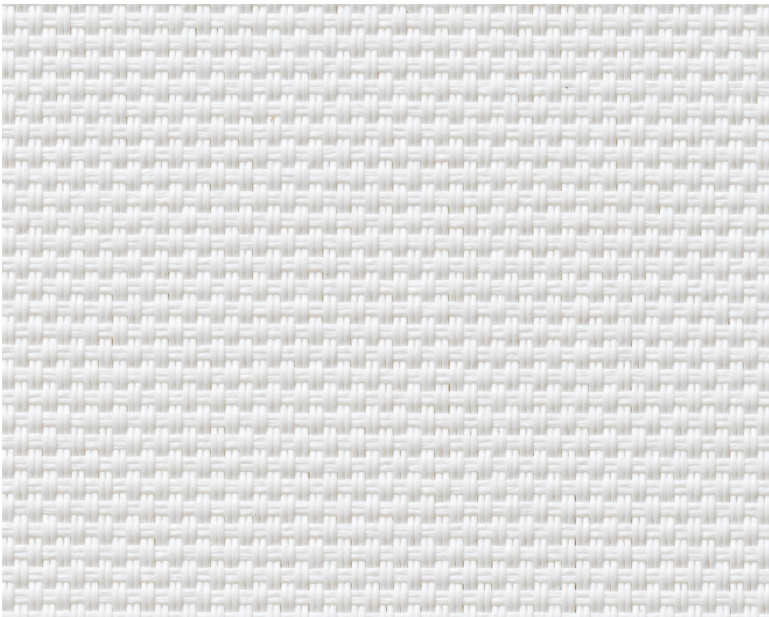

BRIGHT WHITE

SC-A2-500

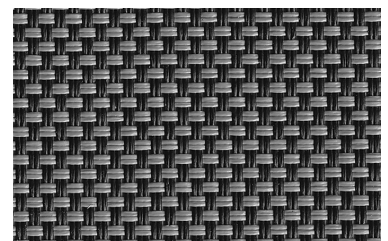

BLACK/GRAY

SC-A2-510



BLACK/BLACK

SC-A2-511

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser

Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	98" / 118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	12.08 oz/yd ²
THICKNESS	.022" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	48*46
BREAKING STRENGTH	Warp 1600 N/5cm Weft 1500 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT

YUMA®

www.yumausa.com