

SUN COOL
FABRICS


F SCREEN 90

OPENNESS FACTOR 3%
SCREEN FABRIC



Your Solutions Weaver and Fabric Support Partner

F Screen 90 provides the best combined performance of view through and solar control due to its symmetric basketweave structure, strong, fiberglass core yarn structure, and two available openness factors. It is an optimal choice for any installation, residential, or commercial.




ROLLER
SHADES




ROMAN
SHADES



PANEL
TRACKS




SKYLIGHT
TRACKS

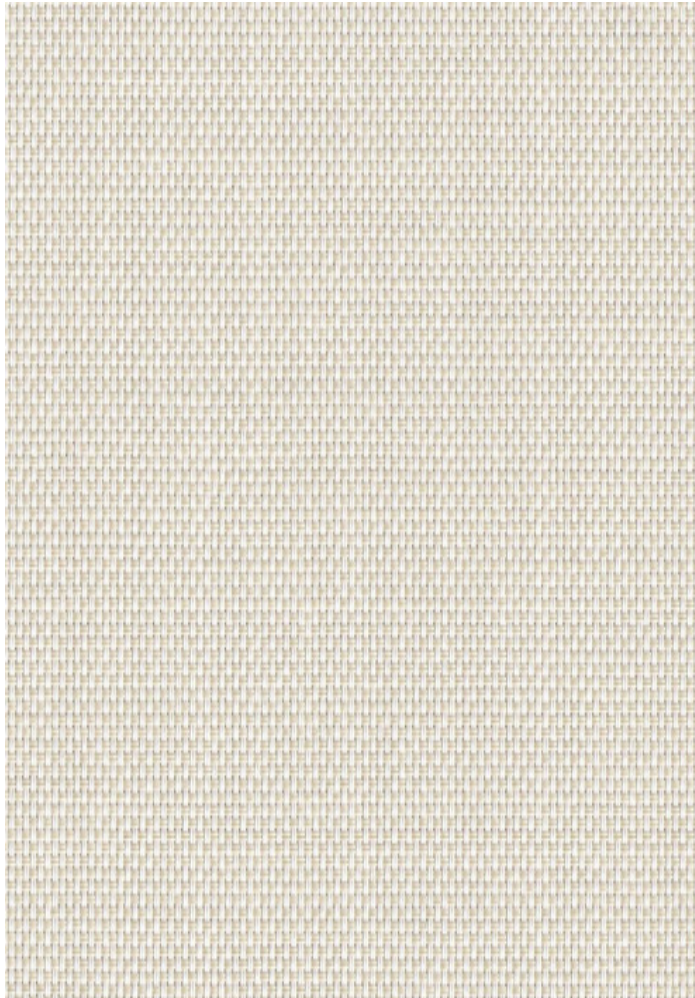


WHITE/LINEN

SC-F2-302

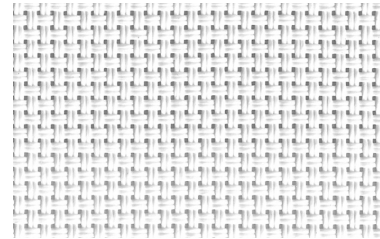

WHITE/WHITE

SC-F2-301

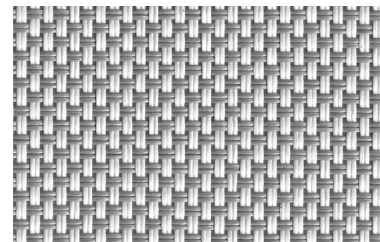

WHITE/GRAY

SC-F2-303



FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser

Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	(3%) 12.87 oz/yd ²
THICKNESS	.020" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	52*44
BREAKING STRENGTH	(3%) Warp 1800 N/5cm (3%) Weft 1800 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT

YUMA®

www.yumausa.com