


BROMUS

OPENNESS FACTOR 5%
SCREEN FABRIC
DECORATIVE



Bromus features multi-colored yarns of linens, grays, and browns to provide the appearance of texture within a beautiful, natural-looking fabric.




ROLLER
SHADES



ROMAN
SHADES



PANEL
TRACKS




SKYLIGHT
TRACKS




DARK BROWN

SC-L1-507

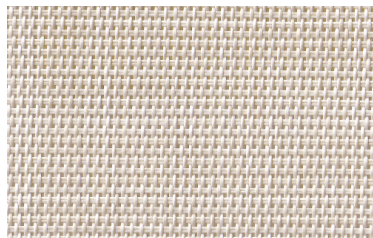


BEIGE

SC-L1-501

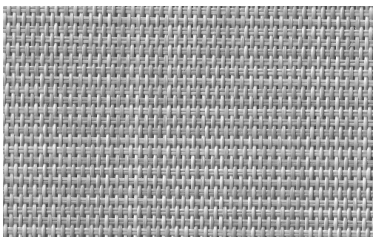


LIGHT GRAY

SC-L1-502

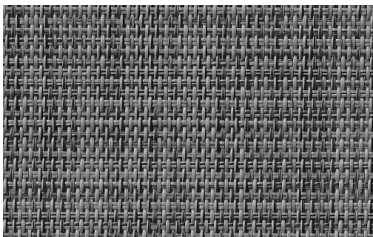


DARK GRAY

SC-L1-503

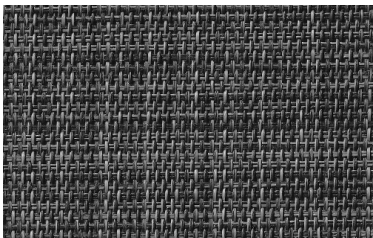

BLACK

SC-L1-504

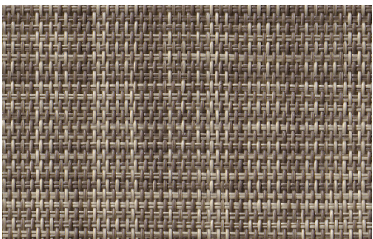

BROWN

SC-L1-506

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser

Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	12.61 oz/yd ²
THICKNESS	.029" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	48*46
BREAKING STRENGTH	Warp 1600 N/5cm Weft 1500 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT

YUMA®

www.yumausa.com